


# ZK-LED65A-4K-3.5MM

## 65 inch LED Splicing Screen

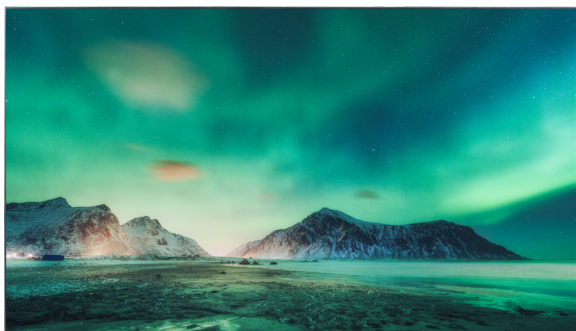

- 65-inch display with UHD 4K (3840 × 2160) resolution
- Direct-lit LED backlight with uniform brightness and no boundary shadows
- Original industrial grade IPS (DID) LED splicing panel
- Wide view of field: 178° (H) / 178° (V)
- Intelligent 3D noise reduction
- Stable and 7 × 24 hours continuous working
- Support software-controlled splice and USB upgrade

### Product Parameters

#### Panel Properties

Screen Size	65 inch
Backlight	Direct-lit LED backlight
Resolution	3840 × 2160
Screen Proportion	16 : 9
Brightness	500 cd/m <sup>2</sup>
Contrast Ratio	1000 : 1
Response Time	8 ms
Color Depth	10-bit 1.07 Billion colors
Life Span	60,000 H (typ)
Viewing Angle	178° / 178° (horizontal / vertical)
Bezel Width	2.4 mm (top / left), 1.4 mm (bottom / right)

\*The above are approximate values, and the actual distance is related to the product and installation.

#### Power

Power Supply	100 to 240 V, 50 to 60 Hz
Power Consumption	< 230W

#### Operating Environment

Operating Temperature	0°C to 40°C
Operating Humidity	10% to 90% (non-condensing)
Operating Hours	7 × 24 h

Interface

Input	USB × 1, HDMI IN × 1, DVI × 1, RS232 IN × 1
Output	RS232 OUT × 2


General

Product Material	Metal
Net Weight	28.8 kg
Product Dimension	1432.6 × 807.6 × 74.9 (mm)
Package Dimension	1630 × 365 × 1010 (mm)
Way to Install	Floor cabinet type, floor bracket type, and wall bracket type

Else

Fittings	AC power cable, warranty card, network cable, hook, adjusting screw, remote controller (optional)
----------	---

Dimensions (mm)

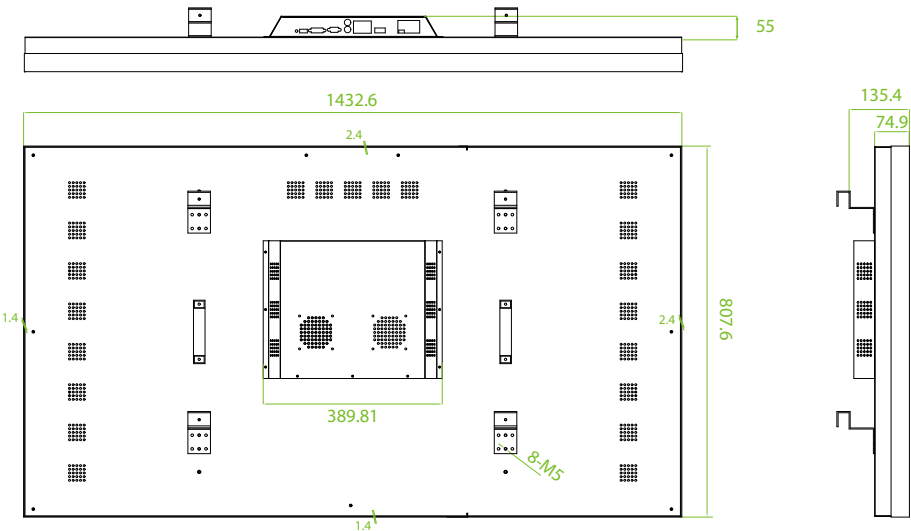

\*Please note that this is the back of the splicing screen.

